

INSTALLATION INSTRUCTIONS

Thank you for purchasing your new Tactical Solutions Trail-Lite barrel upgrade.


MANDATORY USE OF FACTORY MANUAL WARNING

READ THE INSTRUCTIONS AND WARNINGS BEFORE USING THIS PRODUCT

THIS MANUAL IN NO WAY REPLACES OR SUPERSEDES INFORMATION OR INSTRUCTIONS FROM YOUR GUN MANUFACTURER. IN THE EVENT OF A DIFFERENCE OR CONFLICT BETWEEN YOUR MANUFACTURER'S INFORMATION AND INFORMATION CONTAINED HEREIN, THE OFFICIAL MANUFACTURER'S INSTRUCTIONS SHALL ALWAYS TAKE PRECEDENCE.

LOADED WEAPON WARNING

ALWAYS MAKE SURE YOUR GUN IS UNLOADED BEFORE ANY WORK IS STARTED. NEVER CLEAN, LUBRICATE, DISASSEMBLE, REASSEMBLE OR WORK ON ANY FIREARM WHILE IT IS LOADED. KEEP ALL AMMUNITION AWAY FROM THE WORK AREA. EYE PROTECTION IS REQUIRED WHEN WORKING ON ANY FIREARM. KEEP THE MUZZLE POINTED IN A SAFE DIRECTION AT ALL TIMES WHILE WORKING ON YOUR FIREARM! WHEN SHOOTING YOUR GUN ALWAYS WEAR SHOOTING GLASSES AND HEARING PROTECTORS!

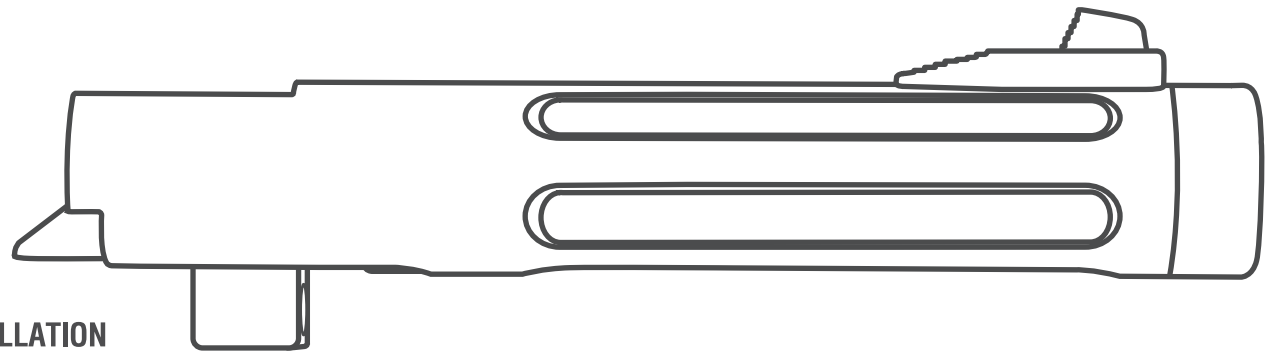

TRAIL-LITE INSTALLATION

STEP 1: REMOVAL OF FACTORY BARREL

Before beginning disassembly to remove your factory Buck Mark® barrel, be certain that the muzzle is pointed in a safe direction. Remove the magazine and carefully check it to verify that it is completely empty. Draw the bolt fully rearward and visually inspect the chamber to be certain that there is no cartridge in it, then lock the bolt in the rearward position using the bolt stop. Carefully remove the sight base screws and sight base. Loosen the barrel block screw at the front of the grip frame until it is free of the barrel block. Pivot the barrel down, and lift the barrel off of the grip frame.

LEAD EXPOSURE WARNING

DISCHARGING FIREARMS IN POORLY VENTILATED AREAS, CLEANING FIREARMS, OR HANDLING AMMUNITION MAY RESULT IN EXPOSURE TO LEAD AND OTHER SUBSTANCES KNOWN TO THE STATE OF CALIFORNIA TO CAUSE BIRTH DEFECTS, REPRODUCTIVE HARM, AND OTHER SERIOUS PHYSICAL INJURY. HAVE ADEQUATE VENTILATION AT ALL TIMES. WASH HANDS THOROUGHLY AFTER EXPOSURE.

HANDLING WARNING

ALWAYS TREAT ALL FIREARMS AS IF THEY WERE LOADED. IF DROPPED OR STRUCK WITH THE SAFETY "OFF", THE PISTOL MAY FIRE. KEEP CHAMBER EMPTY UNLESS ACTUALLY FIRING! KEEP SAFETY "ON" UNLESS ACTUALLY FIRING!

STEP 2: TRAIL-LITE BARREL INSTALLATION

Clean your new Trail-Lite Barrel before installation. Place your Trail-Lite barrel into your frame and hold in place while tightening the barrel block screw. Reinstall the sight base and tighten the screws. If the sight base screw holes do not align, the barrel is not properly tightened against the frame.



For Further Information:
TACTICALSOL.COM



Browning® and Buck Mark®
are Registered Trademarks of Browning.

PERFECTING THE FIREARM EXPERIENCE